


## NMP-Network Managed Robust Digital Signage System

Network-managed MPEG-1/2/4 decoder supporting Flash, PowerPoint, and Windows Media imports  
 Connected across wide area networks and local area networks  
 Reliable 24x7x365 operation

### Technical Specification

Processor	IAN411 Multimedia Networking Processor ESS Digital Media Processor 2 (DMP2) Dual Processor Architecture
Networking	IEEE 802.3 Ethernet 10/100 Base-T w/ Auto-MDIX
Playback Control	UNIX Bash-compatible shell processor with built-in authenticating FTP and HTTP clients
Supported Media Formats and Authoring Tools	Native: MPEG1, MPEG2(MP@ML), MPEG4 (ASP) Microsoft WMV (codec required) Macromedia Flash MX Microsoft PowerPoint 2002/2003 Microsoft Windows XP Movie Maker 2.1 Scala InfoChannel 3 Designer
Content Capacity	Typically 3 Mbps data rate, equivalent to 25 minutes per 512MB memory card 1 hour per 1.2GB memory card
Storage Medium	CompactFlash Type I/II memory card (not included)
Video Performance	Up to 720x480 resolution, 30 frames per second
Video Output	VGA/S-video/Composite RCA video (Monitor not included)
Audio Output	Stereo line-out
Dimensions (L x W x H)	133.5 mm x 113.5 mm x 25 mm 5 1/4 " x 4 1/2" x 1"1"
Weight	1.8 lbs
Mounting holes	4, VESA compliant (10-cm/4-inch)
Power Requirement	100 to 240 VAC, 50/60Hz
Power Consumption	8 Watts
Environment	Recommended: 15 to 35°C, 20 to 80% RH Maximum: 15 to 35°C, 5 to 95% RH Storage: -30 to 65°C
Software System Requirements	IBM-compatible PC 2.8 GHz or faster running IBM-compatible PC 2.8 GHz or faster running Microsoft Windows XP with Service Pack 2 Microsoft Internet Explorer 6 VGA-compatible graphics card 1GB of minimum free space on HD

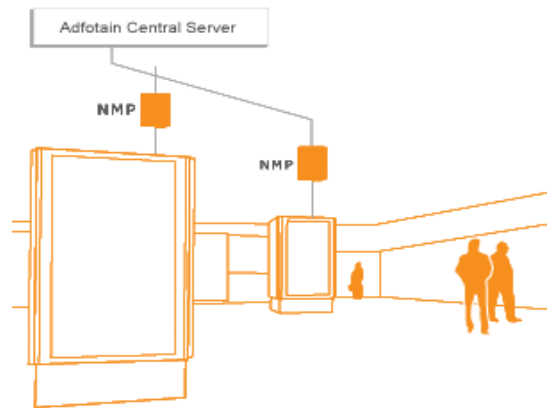

# NXP- Network Digital Signage System with Interactive Expansion Options

Network-managed MPEG-1/2/4 decoder  
 supporting Flash, PowerPoint, and  
 Windows Media  
 imports

Interfaced with RS-232 monitors, touch panels, coupon printers, etc.  
 Reliable 24x7x365 operation

## Technical Specification

Processor	IAN412 Multimedia Networking Processor ESS Digital Media Processor 2 (DMP2) Dual Processor Architecture
Networking	IEEE 802.3 Ethernet 10/100 Base-T w/ Auto-MDIX
Interactivity	Supports 3M MicroTouch EX II via RS-232
Playback Control	UNIX Bash-compatible shell processor with built-in authenticating FTP and HTTP clients
Supported Media Formats and Authoring Tools	Native: MPEG1, MPEG2 (MP@ML), MPEG4 (ASP) Microsoft WMV (codec required) Macromedia Flash MX Microsoft PowerPoint 2002/2003 Microsoft Windows XP Movie Maker 2.1
Security	HTTP Basic Authentication, FTP authentication
Storage Medium	Compact Flash Type I/II memory card (Not included)
Video Performance	Up to 720x480 resolution, 30 frames per second
Video Output	VGA/S-video/Composite RCA video (Monitor not included)
Audio Output	Stereo line-out
Dimensions (L x W x H)	133.5 mm x 113.5 mm x 25 mm 5 1/4"x 4 1/2"x 1
Weight	1.8 lbs
Mounting holes	4, VESA compliant (10-cm/4-inch)
Power Requirement	100 to 240 VAC, 50/60Hz
Power Consumption	8 Watts
Operating Environment	Recommended: 15 to 35°, 20 to 80% RH Maximum: 15 to 35°, 5 to 95% RH Storage: -30 to 65°
Software System Requirement	IBM-compatible PC 2.8 GHz or faster running Microsoft Windows XP with Service Pack 2 Microsoft Internet Explorer 6 VGA-compatible graphics card 1GB of minimum free space on HD

